


Repair screw Stainless steel A2 FABA-A-7,2 x 19 E19

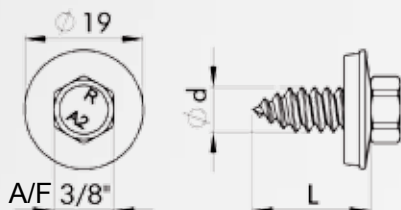

- With technical approval
- Zinc-silver coating
- With captive sealing washer stainless steel A2/EPDM
- For sealing incorrect drillings
- To repair loose rivets and screw connections $\varnothing \leq 6,5$ mm
- Also for fastening solar systems onto thin aluminium and steel sheets

Designation	\varnothing d x L mm	Washer EPDM \varnothing	Grip thickness mm	EAN Item No.	Pack
FABA-A-	7,2 x 19	E19	5	4005674 49907 1 001331V020-0720196-1	500
	7,2 x 19	E19	5	4005674 56358 1 001331V020-0720192-1	100
	7,2 x 19	E19	5	4005674 63597 4 001331V020-0720195-1	20

Drill hole table

Component II thickness mm	0,5-1,25	1,5-2,0
\varnothing of drill hole mm	4,7	5,5



- Quick and easy repair
- No further working step necessary
- High holding force due to large cross section
- Technical approval remains



As a matter of principle, please pay attention to the data as specified in the technical approval Z-14.1-4, appendix 4.43b and Z-14.1-537, appendix 4.1.9/4.2.9