




POP blind rivet Stainless steel A2/aluminium POP-4,8

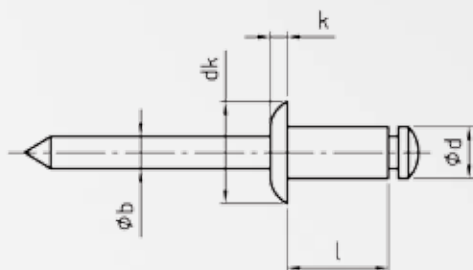

- Blind rivet sleeve aluminium AlMg 3,5
- Captive rivet pin head
- Rivet pin \varnothing 2,6 mm stainless steel A2

Designation	Clamping length mm	Sleeve l mm	dk / k mm	EAN Item No.	Pack
POP-4,8	0,5 – 3,2	7,5	9,5 / 1,6	4005674 49507 3 000232A011-0480076-1	500
	3,2 – 4,8	9	9,5 / 1,6	4005674 49508 0 000232A011-0480096-1	500
	4,8 – 6,4	11	9,5 / 1,6	4005674 49509 7 000232A011-0480116-1	500
	6,4 – 7,9	12,7	9,5 / 1,6	4005674 49522 6 000232A011-0480126-1	500
	7,9 – 9,5	14,7	9,5 / 1,6	4005674 49523 3 000232A011-0480146-1	500
	9,5 – 11,1	16,5	9,5 / 1,6	4005674 49524 0 000232A011-0480166-1	500
	11,1 – 13,5	19	9,5 / 1,6	4005674 49525 7 000232A011-0480196-1	500

Technical information:

- Nominal dimension \varnothing 4,8 mm
- Drill hole \varnothing 4,9 mm
- Normal breaking force: shear 2020 N, tension 2800 N

As a matter of principle, please pay attention to the data as specified in the technical approval Z-14.1-4, appendix 2.7

