




Cup blind rivet Stainless steel A2/aluminium Cup-4,8

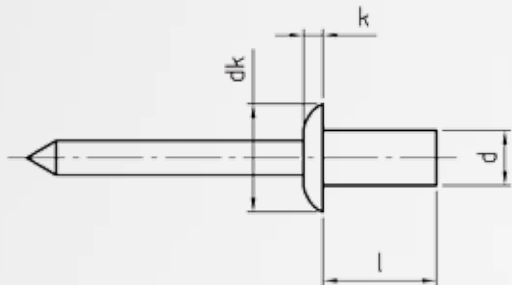

- Truss head, cup-shaped rivet shank
- Blind rivet sleeve aluminium AIMg 5
- Rivet pin \varnothing 2,6 mm stainless steel A2
- Air tight and splash-proofed connection
- Captive rivet pin head

Designation	Clamping length mm	Sleeve l mm	dk / k mm	EAN Item No.	Pack
Cup-4,8	0,5 – 3,2	8,3	9,5 / 1,7	4005674 49486 1 000231A011-0480086-1	500
	3,2 – 4,8	10	9,5 / 1,7	4005674 49487 8 000231A011-0480106-1	500
	4,8 – 6,4	11,5	9,5 / 1,7	4005674 49488 5 000231A011-0480116-1	500
	6,4 – 7,9	13	9,5 / 1,7	4005674 49489 2 000231A011-0480136-1	500
	7,9 – 9,5	14,5	9,5 / 1,7	4005674 49490 8 000231A011-0480146-1	500
	9,5 – 12,7	18	9,5 / 1,7	4005674 49497 7 000231A011-0480186-1	500
	12,7 – 15,9	22	9,5 / 1,7	4005674 49498 4 000231A011-0480226-1	500

Technical information:

- Nominal dimension \varnothing 4,8 mm
- Drill hole \varnothing 4,9 mm
- Normal breaking force: shear 2260N, tension 3110 N

As a matter of principle, please pay attention to the data as specified in the technical approval Z-14.1-4, appendix 2.8